

NAVILITE EXIT & EMERGENCY

THERMOPLASTIC LED EXIT SIGN

AC Only

NXP Series

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Navilite NXP Series Thermoplastic LED Exit Signs offer long lamp life, energy efficiency and uniform illumination in an economical package. Possessing premium installation features such as a snap-fit canopy & housing, along with push-out chevron directional indicators, the NXP Series offers unsurpassed value in an aesthetically pleasing design. All NXP Series signs include a second faceplate and a snap-fit canopy for universal installation.

PRODUCT SPECIFICATIONS

Construction Injection molded, engineering-grade, UV-stable thermoplastic • UL94V-0 flame rating • Impact, scratch, fade and corrosion-resistant • Durable unibody housing frame with reinforcing ribs and integral wiring channel • Snap-fit faceplate and backplate • Second faceplate included for double face applications • 6" letters with 3/4" stroke width • Full-size, 3/4" wide chevron directional indicators • Chevron directional indicators can be easily removed or reinserted as necessary • Red or green letters • White or black textured finish.

Electrical Dual voltage 120/277VAC • Rated for use in damp locations • Optional 2-circuit versions to comply with local codes and special requirements.

Lamps Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red or green LED/letters • Red signs and green signs consume less than 3 watts.

Code Compliance UL924 • Damp location rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • Meets the State of Minnesota energy efficiency requirements.

Warranty 5-year warranty.


Product specifications subject to change without notice.

INSTALLATION

Mounting May be top, back or end mounted • All signs include quick-install snap-fit canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple back mounting.



DIMENSIONS

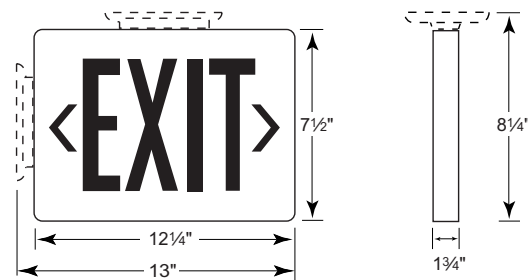

ENGINEERING DATA

	Input Voltage	Max. Amps	Max. Watts
Red LED	120	0.02	2.1
Red LED	277	0.01	2.3
Green LED	120	0.03	2.7
Green LED	277	0.01	2.8

ACCESSORIES

Catalog Number	Description
NVS1	Polycarbonate Vandal Shield - Small
NWG1	Wire Guard - Small

Accessories are ordered separately. To order, specify catalog number. Refer to Options & Accessories specification sheet for additional information.

ORDERING INFORMATION (Ordering Example : NXP3RWH)				OPTIONS (Add as suffix to catalog number.)	
Series NXP = Thermoplastic LED Exit Sign - AC Only	# of Faces 3 = Universal Single/ Double Face	Letter Color R = Red Letters G = Green Letters	Finish WH = White BL = Black	2C	Two-Circuit Operation
				Ordering Example: NXP3RWH2C	

THIS SIDE INTENTIONALLY LEFT BLANK



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2009 Juno Lighting, LLC.