

NXPB Series Thermoplastic LED Exit Sign

Battery Back-Up

ENERGY EFFICIENT

Navilite™



Features

- Long life, energy saving LED lamps
- Injection molded, high impact, UV-stabilized thermoplastic construction in black or white
- Snap-fit faceplate installs without the use of tools
- Field replaceable chevron directional indicators
- Integral wiring channels to facilitate installation
- Universal mounting pattern knockouts in backplate for J-box mounting
- Snap-fit canopy (included) enables speedy top or end mounting
- Maintenance-free sealed NiCad battery
- Universal single face and double face
- Optional High Output version can power an additional 11 watts for remote heads for 90 minutes
- Dual voltage 120/277 VAC operation

Mounting

May be top, back or end mounted • All signs include quick-install snap-fit canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple back mounting



Applications

Slim profile Thermoplastic LED Exit Signs offer long lamp life, energy efficiency and uniform illumination in an economical package. Possessing premium installation features such as a snap-fit canopy and housing, along with push-out chevron directional indicators, the NXPB Series offers unsurpassed value in an aesthetically pleasing design.

Code Compliance

- UL 924
- Damp location rated (except HO and SD versions)
- NFPA 101 Life Safety Code Compliant
- NEC and OSHA Compliant

Ordering Information Example: NXPB3RWHSD

Series	Number of Faces	Letter Color	Finish	Options ¹
NXPB	3	R	WH	SD
NXPB Series	3-Universal Single/Double Face	R-Red G-Green	WH-White BL-Black	HO-High Output/Remote Capable SD-Self-Diagnostics

¹ Options may not be combined – for applications requiring multiple options, consult factory

Electrical Data

Lamps Energy saving LED lamps connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED

	Input Voltage	Max. Amps	Max. Watts	Standby Watts*
Red LED	120	0.03	3.1	2.7
Red LED	277	0.01	3.6	3.1
Green LED	120	0.03	3.1	2.8
Green LED	277	0.01	3.2	3.0
Red LED - HO Option	120	0.06	7.0	4.3
Red LED - HO Option	277	0.03	6.7	3.8
Green LED - HO Option	120	0.08	8.5	6.2
Green LED - HO Option	277	0.03	9.1	6.5

*Fully charged battery

Battery • Standard battery will operate sign for 90 minutes in the event of a power outage • HO version will operate the sign plus an additional 11W remote load for 90 minutes • Lead calcium battery warranted for one full year • Nickel cadmium battery warranted for five full years

Battery Type	Temp. Range ¹
Nickel Cadmium (Std.)	32°F-100°F
Lead Calcium (HO)	40°F-95°F


¹To obtain rated life and capacity.

Accessories

Catalog Number	Description
NVS1	Polycarbonate Vandal Shield - Small
NVS2	Polycarbonate Vandal Shield - Medium Bubble
NWG1	Wire Guard - Small

NVS1 will not fit optional HO versions - specify NVS2 instead. Accessories are ordered separately. To order, specify catalog number. Refer to Accessories section pages 1104-1106 for additional information.

Dimensions

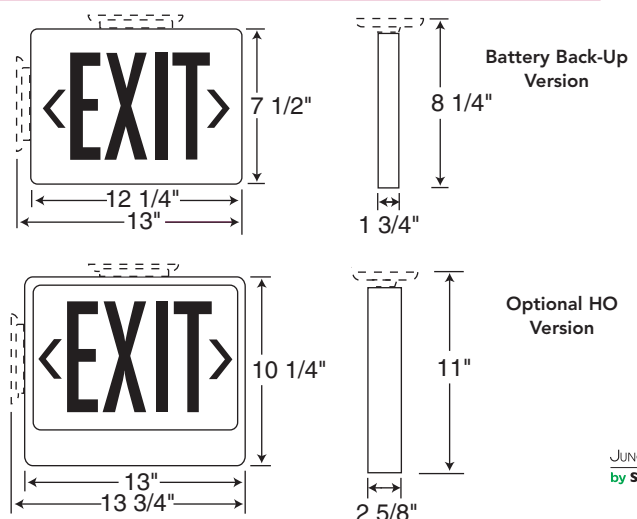

Exit Signs

