



Applications

New York approved NNYXSC Series offers unsurpassed value and performance for commercial and retail applications.

Code Compliance

- UL 924
- NFPA 101 Life Safety Code Compliant
- NEC and OSHA Compliant
- New York City Approved
- Calendar No. 46932

Features

- Includes three lighting heads, combining exit signage with the emergency lighting function for a convenient, comprehensive solution
- Rugged, heavy duty 20-gauge die formed steel construction
- Lighting heads made from high impact thermoplastic
- Universal mounting pattern knockouts in backplate for back mounting
- 8" letters with 1" stroke width
- Chevron directional indicator knockouts
- Includes three 6V, 9W lighting heads
- Heads are fully adjustable for comprehensive lighting coverage
- Maintenance-free, 6V sealed lead calcium battery
- Dual voltage 120/277 VAC


Mounting

May be back mounted • Backplate includes universal mounting pattern knockouts for simple back mounting

Ordering Information Example: NNYXSC1RWH3

Series	Number of Faces	Letter Color	Finish	Number of Heads
NNYXSC	1	R	WH	3
NNYXSC Series	1-Single Face	R-Red	WH-White	3-3 Heads

Dimensions

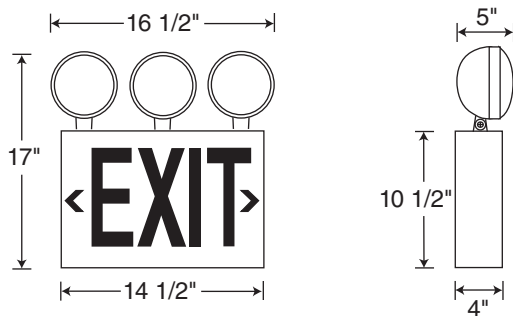

Electrical Data

Lamps Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red LED/letters • Red signs consume less than 5 watts

	Input Voltage	Max. Amps	Max. Watts	Standby Watts*
Red LED	120	0.08	8.5	4.1
Red LED	277	0.04	9.5	4.0

*Fully charged battery

Battery

Sealed, maintenance-free lead calcium • Standard battery will operate sign and three 9W heads for a minimum of 90 minutes in the event of a power outage • Lead calcium battery warranted for one full year

Battery Type	Battery Voltage	Temp. Range ²
Lead Calcium (Std.)	6V, 12Ah	40°F-95°F

²To obtain rated life and capacity

